



# TRUNNION MOUNTED BALL VALVES

ENGINEERED FOR HIGH PERFORMANCE AND LOW EMISSIONS



6D0301



# INTRODUCTION TO THE COMPANY



## THE MICROFINISH WAY

Microfinish group is a privately owned and managed organization specializing in industrial valves and pumps for energy, process, and natural resource industries. The guiding principles of Microfinish are:

- Personal commitment to our customers
- Top quality in everything we do
- Best available technology for all our products and services

## INTRODUCTION


Microfinish group was established in 1971 to manufacture ball valves, bellows sealed globe valves, globe valves for chlorine service, gate, globe check valves, and knife edge gate valves. Other valves and pumps were added to the product range in later years. For the last 35 years we have designed, developed, and supplied our products to:

- Oil and gas facilities, hydrocarbon processing refineries, and petrochemical plants
- Fossil fuel, nuclear, and co-generation power plants
- Fertilizer, chemical, and pharmaceutical industries
- Food and beverage plants
- Mining, minerals processing, and steel sectors
- Pulp and paper mills

We are recognized as a quality manufacturer of reliable valves and pumps for industry. Our wealth of experience has enabled Microfinish to become a prominent supplier of ball valves throughout the world, and of chemical process pumps in India.

Industrial technology is progressing at a remarkable rate, so we have established a research and development department equipped with modern test facilities.

Our manufacturing facilities are located in separate and well laid-out buildings with ample scope for future expansion. The industrial estate in Hubli is one of the biggest and fastest developing manufacturing zones in the state of Karnataka. The city of Hubli is well served by air, rail, and road connections; it is situated on the national highway NH 4 between Mumbai and Bangalore.

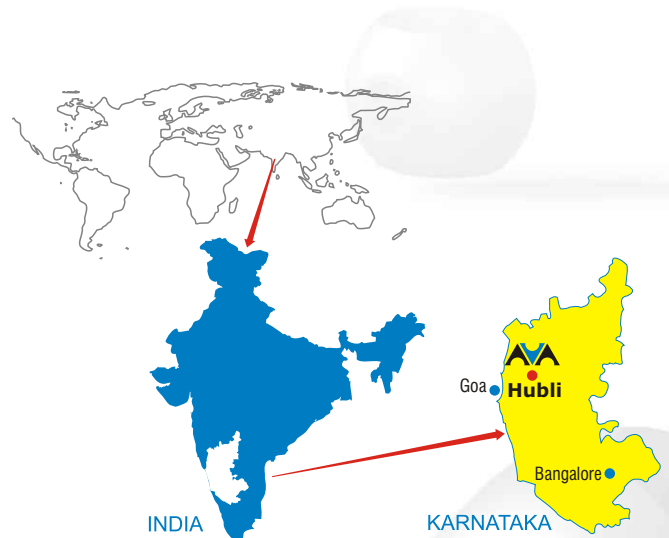

## PRODUCTS

We manufacture the following products in various materials including carbon steel, stainless steel, duplex, and high nickel alloys.

- Ball valves in floating and trunnion mounted designs with cast and forged bodies, including three way and jacketed configurations, and special versions for cryogenic and high temperature services
- Bellows sealed globe valves
- Globe valves for chlorine service
- Butterfly valves
- Knife edge gate valves
- Gate, globe, and check valves in forged and cast versions
- Chemical process pumps in standard and specialty configurations
- Sanitary and slurry pumps

Microfinish is committed to total quality. Stringent and efficient quality assurance and control systems have been implemented in accordance with ISO 9001: 2000.

In 1994 our organization was the first in India to receive the prestigious ISO 9001 certificate (1994 edition) from RWTÜV in Germany. Microfinish ball valves have also had API 6D certification since February 1999 and PED certification since 2002.

In 1988 the International Labor Organization in Geneva gave Microfinish an award for good working conditions and environment as a result of the hard work of every employee and the commitment of management.

## IN-HOUSE FACILITIES FOR QUALIFICATION TESTS

- Fire safe
- High temperature with superheated steam
- Low temperature for cryogenic valves
- Life cycle
- Fugitive emissions
- Pump performance and NPSH
- Noise and vibration

# PRODUCTS



Microfinish Trunnion Mounted Ball Valves are available in both reduced bore and full bore designs in sizes from 50 to 900 mm and pressure classes from ANSI 150 to 2500. Ball valves are designed using the latest CAD software to achieve the highest levels of performance, reliability, and safety as required by the user industries.



Design standards are API 6D and ASME B16.34. Fire safe testing is certified by third party inspectors.

## STANDARD DESIGN FEATURES

- Designed and manufactured to API 6D
- Minimum shell thickness to ASME B 16.34
- Fire safe design to API 607 and API 6FA
- Bolted or fully welded body design
- Three alternative seating arrangements
- Double block and bleed
- Face to face dimensions to API 6D and ANSI B16.10
- Flanged and welding ends with or without transition pups
- Actuator mounting flange to ISO 5211
- Lever, gear, electric, pneumatic, hydraulic, gas, and gas over oil operation
- Bidirectional fluid flow

## OPTIONAL FEATURES

- Compliant with NACE MR 0175 for sour gas service
- Emergency sealant injection
- Stem extension for underground installations
- Double piston seat effect
- Metal seated ball valves
- High temperature ball valves
- Cryogenic ball valves
- Special overlay on balls and seats for abrasive services
- Special coatings on valve bodies and fasteners

## APPLICABLE STANDARDS

- Design standard API 6D, API 608, ASME B 16.34  
BS EN ISO 17292
- Testing standard API 6D, API 598, BS EN 12266  
ISO 5208, ASME B 16.34
- Flange standard ASME B 16.5
- Welding ends ASME B 16.25
- Sour gas service NACE MR 0175
- Fire safe testing API 607, API 6FA

## TEST PRESSURES


Valve Rating Pressure Class	Test Pressure - bar		
	Hydro Shell*	Hydro Seat*	Air Seat
150	30	22	6
300	77	57	6
600	153	113	6
900	230	169	6
1500	383	281	6
2500	638	468	6

\*Applicable for WCB material


## PRESSURE TEMPERATURE RATING OF SEAT

The pressure temperature rating of a ball valve is determined by either the body or the seat limits. Materials of construction, fluid properties, and operating parameters are also influential factors. The ratings in the graph should therefore be used only as a guide. For temperatures below -30°C consult Microfinish.

The dotted lines indicate pressure temperature ratings for metal seated ball valves with SS 316 trim. Ratings may vary with other trim materials.

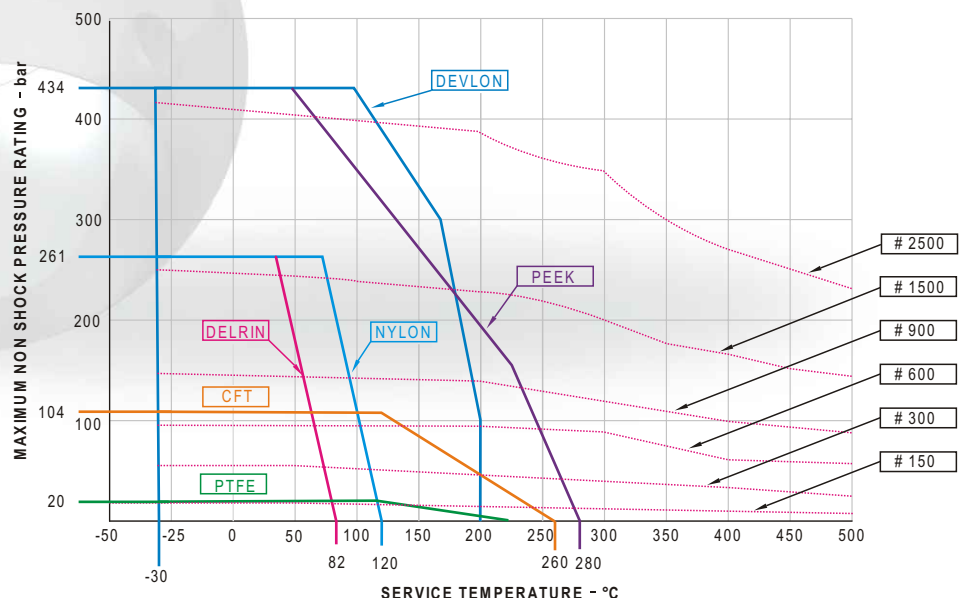

# DESIGN FEATURES FOR

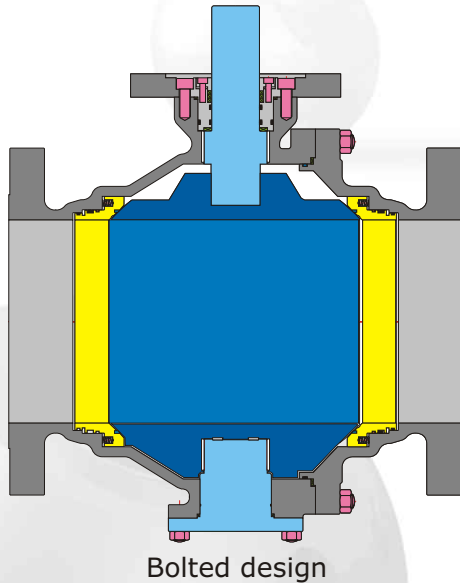

## VALVE DESIGN

Microfinish valves conform to and exceed the design requirements of API 6D and ASME B 16.34. All valves are fire safe designs. Pressure temperature ratings and flange dimensions conform to ASME B16.34 and 16.5.

The two piece bolted construction provides maximum rigidity to withstand pipeline forces and facilitates maintenance on site. A fully welded body design is also available.

Both reduced bore and full bore configurations are available. End connections may be welding ends or flanged with either raised face or ring type joints.


## STANDARD SEAT FEATURES

**Single Seat:** Cavity relief combined with a block and bleed trunnion ball and floating seat guarantees a tight shut-off. Two independent spring loaded seat rings are always in contact with the ball to provide a tight and effective seal at low differential pressures. At higher differential pressures the upstream seat ring becomes pressure energized against the ball to form a tight seal, while the downstream seat remains spring loaded. Springs are fully confined to avoid fluid contact and build up of debris.


**Cavity Relief:** This seating system is designed to vent automatically any excess pressure in the body cavity. The floating seat design allows for relief of excess pressure to the downstream side.

**Double Block and Bleed:** The floating seats provide a double block and bleed function when a drain plug or a bleed valve is mounted on the body. The cavity can be relieved through vent or drain connections. The independent upstream and downstream sealing ensures tight shut-off at the body cavity in the fully open or closed position. This feature prevents fluid contamination and detects seat leakage with out removing the valve from the pipeline.


**Optional Double Sealing Feature:** This is achieved by a seat design with double piston effect. If the upstream seat fails, the downstream seat will seal effectively. This seat design does not provide self body cavity relief unless a relief valve is fitted to the body.

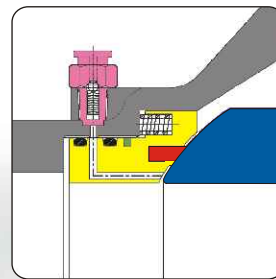



Metal to metal seating with non metallic insert

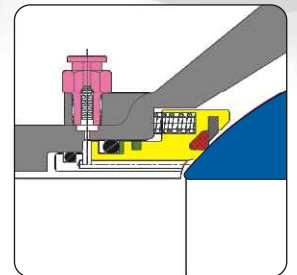

Metal to metal seating with o-ring insert

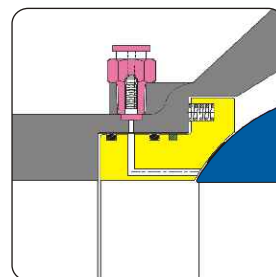

Metal to metal seating

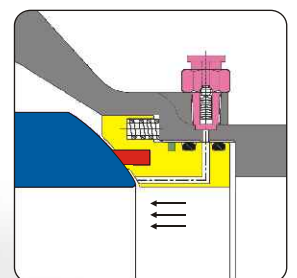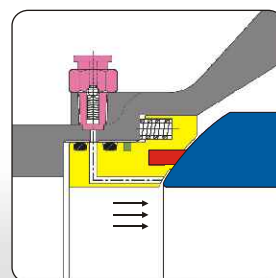

Double block and bleed design





Fully welded design

## LOW EMISSION STEM SEALING

A double o-ring system provides excellent stem sealing in normal operating conditions. A secondary graphite seal is retained by a gland for fire safety. The blowout proof stem design allows replacement of stem seals under pressure when the valve is in either the fully closed or the fully open position, and the pressure in the cavity has been completely released. These valves meet the latest fugitive emission requirements.

## SEALANT INJECTION

Microfinish ball valves are designed and manufactured to provide tight shut-off. A sealant injection system can be provided on request. In the event of contaminants causing damage to the seat insert or stem seal, an emergency seal can be formed using the sealant injection system.

## DOUBLE SEALING

The body joints are furnished with double sealing arrangements for maximum security.

## TRUNNION MOUNTED BALL

Our standard design includes a trunnion mounted ball. Forces acting on the ball are transmitted to the valve body through the stem and trunnion. Steel backed PTFE impregnated bearings support rotation of the stem and trunnion, thus minimizing friction caused by the side thrust resulting from the action of fluid pressure on the ball. The result is a lower operating torque and the bearings are maintenance free.

## ANTISTATIC FEATURE


To meet antistatic requirements all valves are provided with stainless steel springs which ensure electrical continuity between ball and stem, and between stem and body.

## FIRE SAFE DESIGN


Microfinish trunnion mounted ball valves have been designed to meet the fire safety standards of API 607 and API 6FA. Valves are fire safe tested, witnessed, and certified by an independent third party.

## STEM EXTENSION FOR UNDERGROUND INSTALLATIONS


Microfinish supplies valves with suitable stem extensions. All drain, vent, and emergency sealant lines are extended and all pipes are firmly attached to the stem extension.

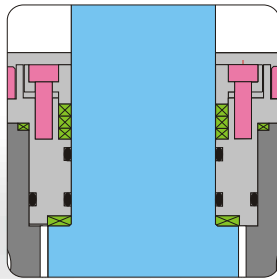

Low emission stem sealing

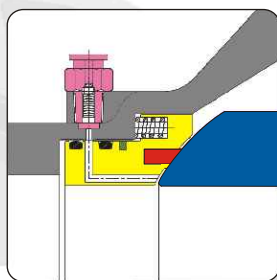

Sealant injection

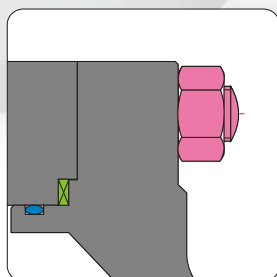


Double sealing on body joints




Stem extension for underground installations

# DIMENSIONS

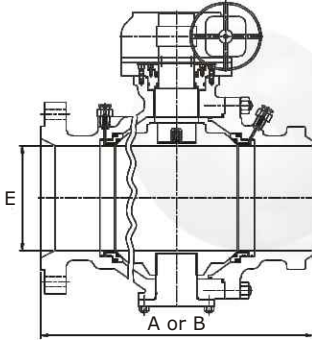

- 2-piece design with bolted cast body
- Raised face flanged or welding ends
- Gear operated

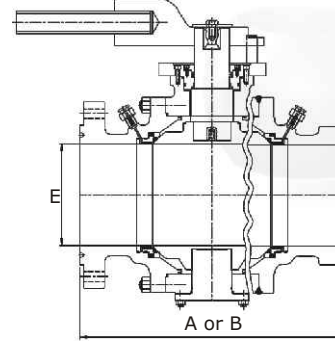

- 3-piece design with bolted or welded forged body
- Ring joint flanged or welding ends
- Lever operated

RB = Reduced bore

Class 150, class 300, and class 600

FB = Full bore

SIZE (mm)		A (Flanged ends - raised face)			B (Welding ends)			E	
RB	FB	# 150	# 300	# 600	# 150	# 300	# 600	# 150,300,600 RB	FB
80x50	50	178	216	292	216	216	292	49	49
80x50	80	203	283	356	283	283	356	74	74
100x80	100	229	305	432	305	305	432	100	100
150x100	150	394	403	559	457	457	559	150	150
200x150	200	457	502	660	521	521	660	201	201
250x200	250	533	568	787	559	559	787	201	252
300x250	300	610	648	838	635	635	838	201	303
350x250	350	686	762	889	762	762	889	252	334
400x300	400	762	838	991	838	838	991	303	385
450x350	450	864	914	1092	914	914	1092	334	436
500x400	500	914	991	1194	991	991	1194	385	487
550x450	550	991*	1092	1295	1092*	1092	1295	436	538
600x500	600	1067	1143	1397	1143	1143	1397	487	589
650x550	650	1143	1245	1448	1245	1245	1448	538	633
700x600	700	1245	1346	1549	1346	1346	1549	589	684
750x600	750	1295	1397	1651	1397	1397	1651	589	735
800x650	800	1372	1524	1778	1524	1524	1778	633	779
850x700	850	1473	1626	1930	1626	1626	1930	684	830
900x750	900	1524	1727	2083	1727	1727	2083	735	874

RB = Reduced bore

Class 900 and class 1500

FB = Full bore


SIZE (mm)		A (Flanged ends - ring joints)		B (Welding ends)		E			
RB	FB	# 900	# 1500	# 900	# 1500	# 900		# 1500	
RB	FB					RB	FB	RB	FB
32x25	25	254*	254*	254*	254*		25		25
32x25	32	280*	280*	280*	280*	25	32	25	32
40x32	40	305*	305*	305*	305*	32	38	32	38
50x40	50	368	368	368	368	38	49	38	49
80x50	80	381	470	381	470	49	74	49	74
100x80	100	457	546	457	546	74	100	74	100
150x100	150	610	705	610	705	100	150	100	144
200x150	200	737	832	737	832	150	201	144	192
250x200	250	838	991	838	991	201	252	192	239
300x250	300	965	1130	965	1130	252	303	239	287
350x250	350	1029	1257	1029	1257	252	322	239	315
400x300	400	1130	1384	1130	1384	303	373	287	360
450x350	450	1219	--	1219	--	322	423	--	--
500x400	500	1321	--	1321	--	373	471	--	--
550x450	550	1422*	--	1422*	--	423	522	--	--
600x500	600	1549	--	1549	--	471	570	--	--

- All dimensions are in mm. 2. Dimensions "A" and "B" are certified and others are indicative.
- Reduced bore valves are also available with one, two, and three size smaller bores. 4. Weights of valves and other dimensions are available on request. 5. Dimensions of class 2500 valves are available on request.
- \* These dimensions are not listed in API 6D standard, so are the Microfinish standard. 7. The following configurations are available on request: fully welded construction; forged steel design; flange drilling other than ANSI.
- Operators available: lever, gear, electrical, pneumatic, hydraulic, gas, and gas over oil.

# PARTS NUMBERS




## TWO PIECE

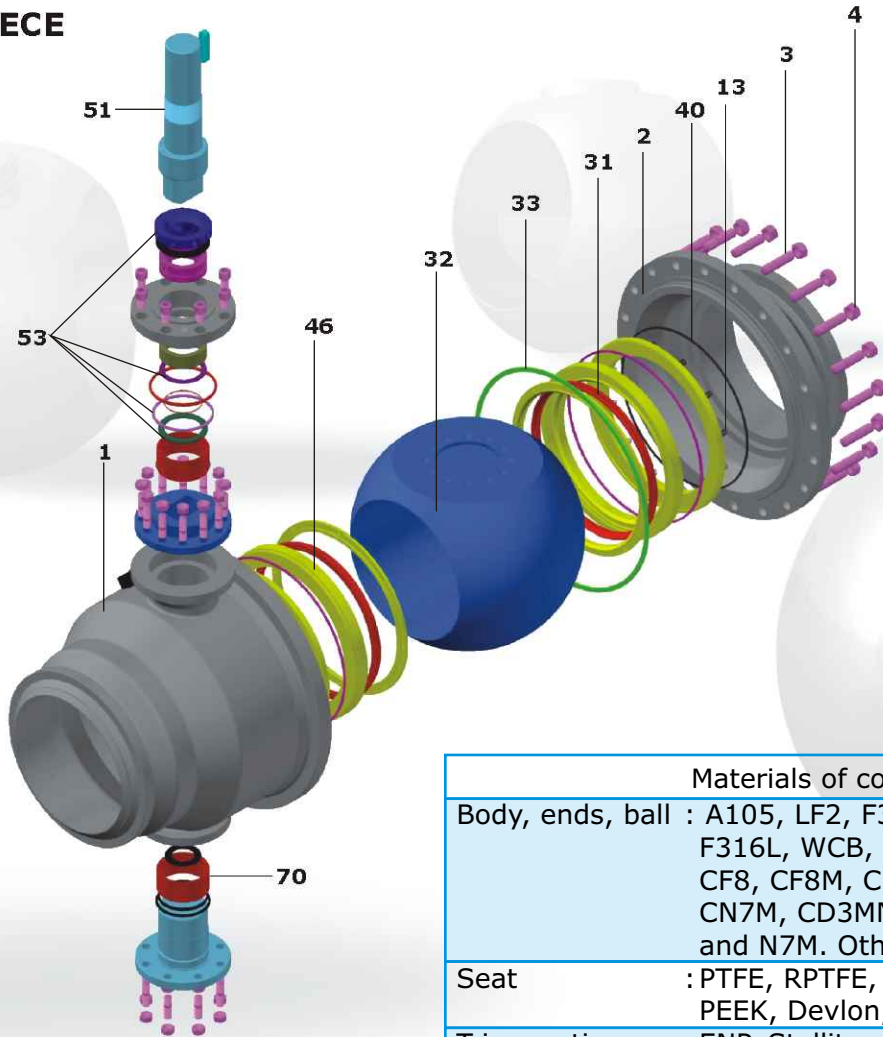

Materials of construction	
Body, ends, ball	: A105, LF2, F304, F316, F304L, F316L, WCB, WCC, LCB, LCC, CF8, CF8M, CF3, CF3M, CD4MCu, CN7M, CD3MN, CN3MN, CW6M and N7M. Other materials on request.
Seat	: PTFE, RPTFE, nylon, Delrin, PEEK, Devlon, metal
Trim coatings	: ENP, Stellite, carbide, or nickel boron

## THREE PIECE

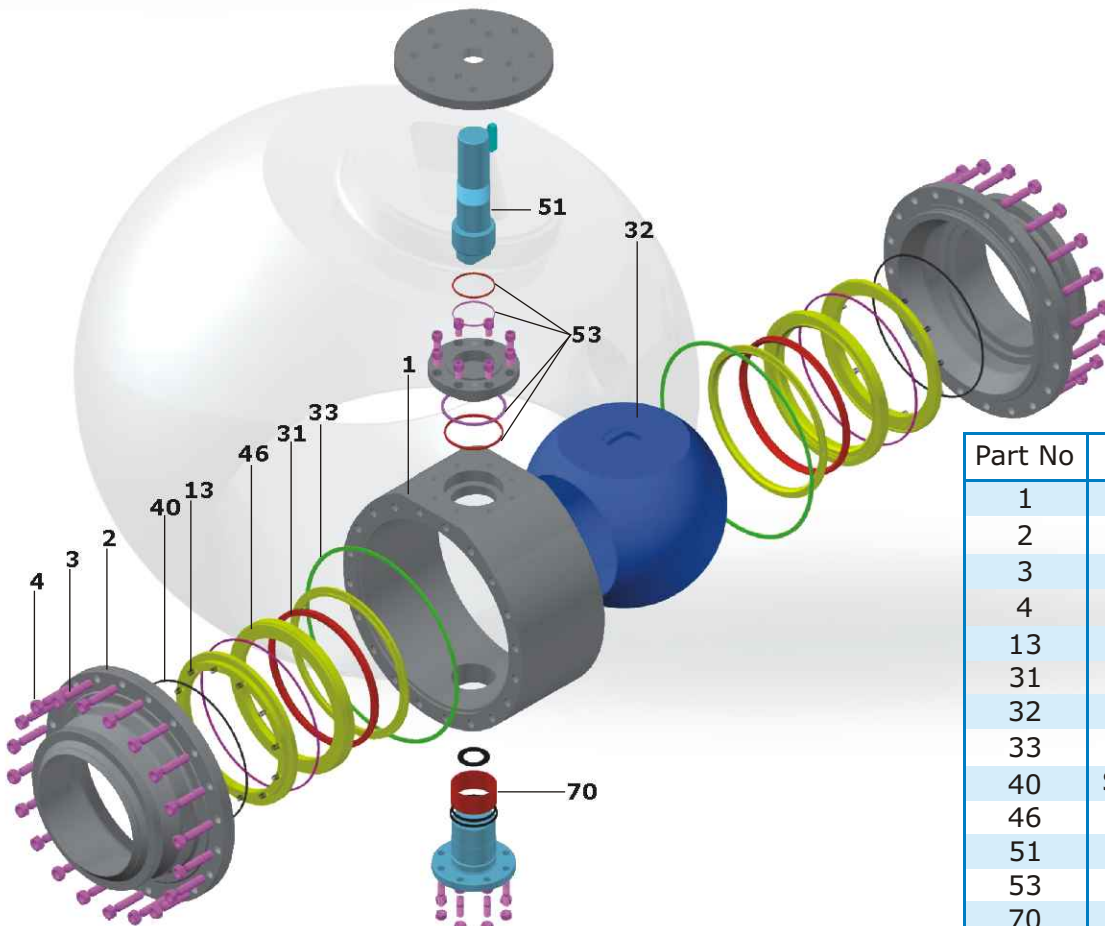

Part No	Name of the Part
1	Body
2	Tailpiece
3	Body Stud
4	Body Nut
13	Spring
31	Seat
32	Ball
33	Body Seal
40	Seat Retainer 'O' Ring
46	Seat Retainer
51	Stem
53	Stem Seal
70	Bearing

## PRODUCT RANGE

SERIES	SIZES-mm	SERIES	SIZES-mm	BORE	PRESSURE CLASS	END CONNECTIONS
TWO PIECE CONSTRUCTION		THREE PIECE CONSTRUCTION				
T84R2	50-900	T84R3	50-900	RB	150	FE, WE
T84F2	50-900	T84F3	50-900	FB	150	FE, WE
T85R2	50-900	T85R3	50-900	RB	300	FE, WE
T85F2	50-900	T85F3	50-900	FB	300	FE, WE
T87R2	50-900	T87R3	50-900	RB	600	FE, WE
T87F2	50-900	T87F3	50-900	FB	600	FE, WE
T89R2	25-600	T89R3	25-600	RB	900	FE, WE
T89F2	25-600	T89F3	25-600	FB	900	FE, WE
T90R2	25-400	T90R3	25-400	RB	1500	FE, WE
T90F2	25-400	T90F3	25-400	FB	1500	FE, WE
T91R2	25-300	T91R3	25-300	RB	2500	FE, WE
T91F2	25-300	T91F3	25-300	FB	2500	FE, WE

RB = Reduced bore. FB = Full bore. FE = Flanged ends. WE = Welding ends.

## SALES OFFICES

Branches	Telephone numbers	Fax	E-mail
BANGALORE	080-32414141, 23322299	080-23322900	<a href="mailto:salesbangalore@microfinishgroup.com">salesbangalore@microfinishgroup.com</a>
BARODA	0265-3250701, 2788825	0265-2788826	<a href="mailto:salesbaroda@microfinishgroup.com">salesbaroda@microfinishgroup.com</a>
CHENNAI	044-32525558	044-24800175	<a href="mailto:saleschennai@microfinishgroup.com">saleschennai@microfinishgroup.com</a>
HYDERABAD	040-32426655	040-27890314	<a href="mailto:saleshyd@microfinishgroup.com">saleshyd@microfinishgroup.com</a>
KOLKATA	033-32524442	033-24292085	<a href="mailto:saleskolkata@microfinishgroup.com">saleskolkata@microfinishgroup.com</a>
LUCKNOW	0522-2473568	0522-2473568	<a href="mailto:salesluck@microfinishgroup.com">salesluck@microfinishgroup.com</a>
MUMBAI	022-32489966, 25008254	022-25003942	<a href="mailto:salesbom@microfinishgroup.com">salesbom@microfinishgroup.com</a>
NEWDELHI	0120-3259966, 2510145	0120-2510157	<a href="mailto:salesdelhi@microfinishgroup.com">salesdelhi@microfinishgroup.com</a>
PUNE	020-25448989, 25468989	020-25468989	<a href="mailto:salespune@microfinishgroup.com">salespune@microfinishgroup.com</a>
RAIPUR	0771-2262195	0771-2262195	<a href="mailto:salesraipur@microfinishgroup.com">salesraipur@microfinishgroup.com</a>
VISAKHAPATNAM	0891-3200022	0891-2598400	<a href="mailto:salesvizag@microfinishgroup.com">salesvizag@microfinishgroup.com</a>

## EXPORT SALES

Contact the headquarters in Hubli, Karnataka, India at the below address.

**MICROFINISH VALVES PVT.LTD.** 

B161-162, Industrial Estate, Gokul Road, Hubli-580 030 Karnataka, India

Phone No: 91-836-2212404, 2210611 Fax No: 91-836-2331438

E-mail: [sales@microfinishgroup.com](mailto:sales@microfinishgroup.com) Website: [www.microfinishgroup.com](http://www.microfinishgroup.com)